



MULTIPLEX DISTRIBUTOR (ELECTRICAL)

EXTERNAL DISTRIBUTION UNIT

PRODUCT DATA SHEET



Description

Optimise your industrial laundry system with our advanced External Laundry Dispensing Unit, designed to connect multiple washers to our dispensing unit. With configurations from 3+1 to 10+1 channels, this high-performance unit offers versatility and efficiency.

Key Features:

Electric Solenoid Valves: Ensure precise and reliable control with these valves, optimising chemical distribution.

Simple Integration: Easily connects to our industrial laundry units, improving operational efficiency.


Total Compatibility: Designed to work in harmony with our dispensing unit, ensuring efficient dispensing.

Robust Construction: Durability guaranteed to withstand the demands of industrial environments, minimising maintenance.

Technical Specifications

	Value
MATERIAL	Material: PP (Polypropylene) Connector: 3/8"
BARBS	Material: PVDF Connector: 3/8" - Tubing 10mm
CONFIGURATIONS	4+1 - 11+1
VALVE TYPE	Electric solenoid valves
VOLTAGE	24 VDC
CLOSURE PISTON	PTFE
RECOMMENDED WIRING	0.5 mm cross-section multi-stranded cable

Diagram

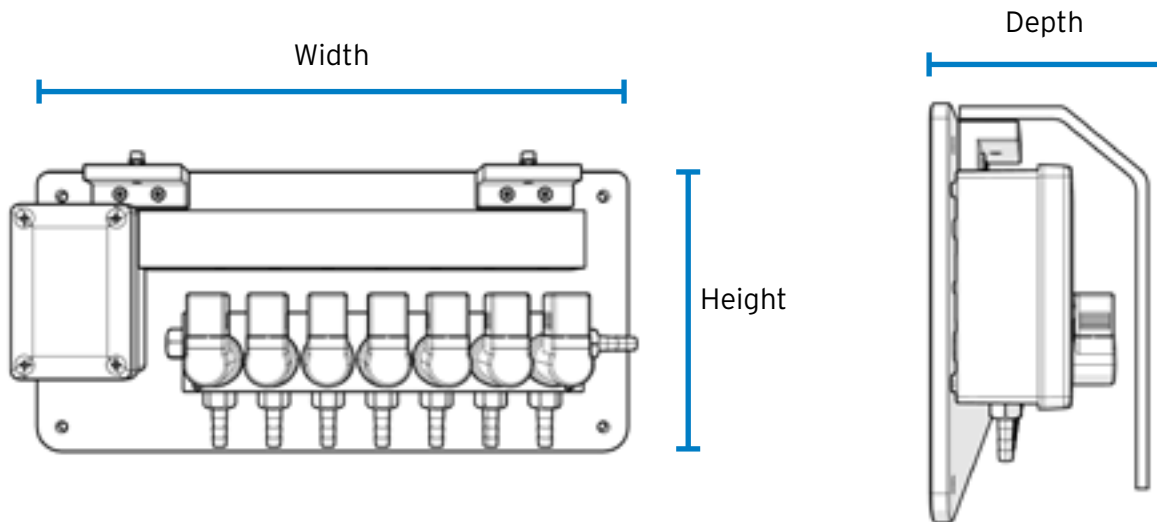


Dimensions (mm)

	Width	Height	Depth
4+1 / 5+1	390	225	149
6+1 / 7+1	475	225	149
8+1 / 9+1	700	225	149
10 + 1 / 11 + 1	780	225	149

Weight

4+1 / 5+1	4 kg (approx)
6+1 / 7+1	6 kg (approx)
8+1 / 9+1	7 kg (approx)
110 + 1 / 11 + 1	9 kg (approx)

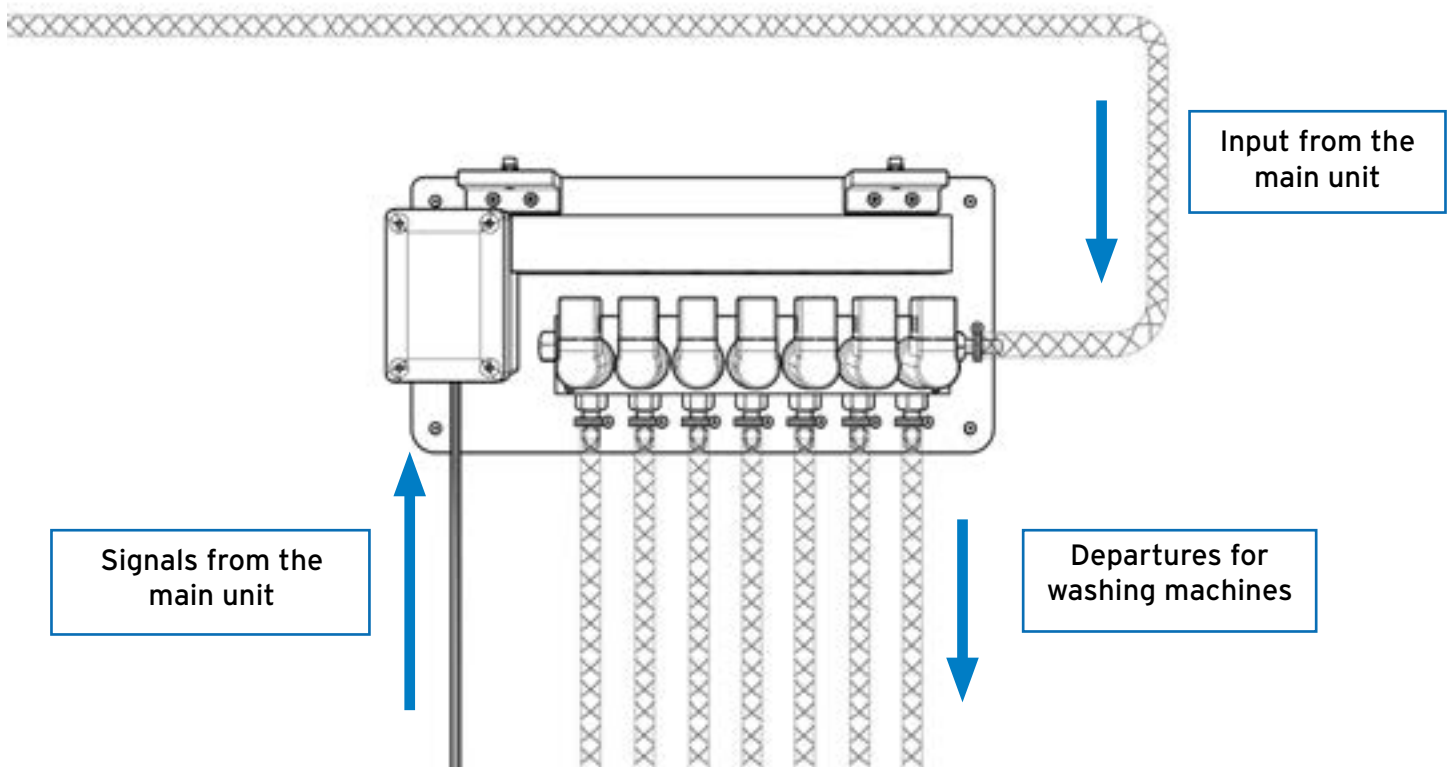

T +44 (0) 1273 513566 E sales@brightwell.co.uk W brightwell.co.uk

Unit 1, Rich Industrial Estate, Avis Way, Newhaven, East Sussex, BN9 0DU, UK

All information in this data sheet is correct at the time of printing and is subject to change without notice.